


264 Winchester Magnum

Case: Winchester	Primer: Federal 215
Case Trim: 2.490"	Barrel Length: 24"
Twist Rate: 1:9"	Barrel: Wiseman

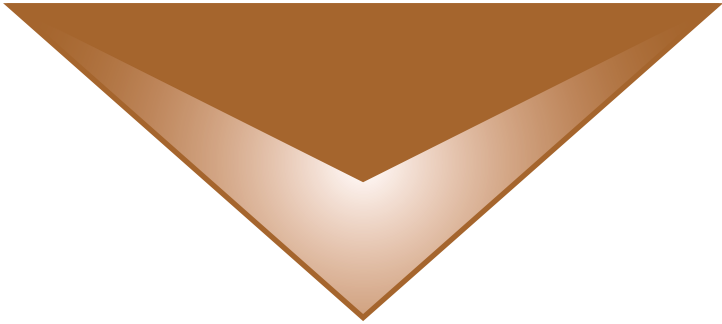

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

* *Recommended Powder*

° Compressed Load

264 Winchester Magnum



100-grain TTSX BT
Sectional Density .205
Ballistic Coefficient .359
C.O.A.L 3.225"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro 4000MR	58.2	3262	64.7	3587
IMR 4831	56.6	3239	62.9	3535
*RL 22	60.6	3292	67.4	3578
IMR 7828 SSC	60.5	3246	67.2	3540
Retumbo	66.1	3303	73.4 ^c	3593
Magnum	67.5	3277	75.1	3605



120-grain TSX BT
Sectional Density .246
Ballistic Coefficient .381
C.O.A.L 3.170

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4831	51.1	2925	56.8	3157
PowerPro 4000MR	51.9	2953	57.6	3176
*RL 22	55.6	3013	61.7	3236
IMR 7828SSC	54.7	2963	60.8	3202
Retumbo	60.9	3038	67.6	3288
Magnum	61.7	2997	68.6	3265



120-grain TTSX BT
Sectional Density .246
Ballistic Coefficient .412
C.O.A.L 3.225

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

264 Winchester Magnum



127-grain LRX BT
 Sectional Density .260
 Ballistic Coefficient .468
 C.O.A.L 3.225"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro 4000MR	50.3	2770	55.9	3017
*RL 22	52.5	2851	58.3	3067
IMR 7828SSC	50.4	2763	56.0	2974
Retumbo	56.4	2905	62.7	3126
Magnum	60.4	2879	67.1	3140

Recommended Twist 1:8" or faster



130-grain TSX FB
 Sectional Density .266
 Ballistic Coefficient .365
 C.O.A.L 3.180"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro 4000MR	51.9	2830	57.7	3084
*RL 22	53.8	2862	59.8	3089
IMR 7828 SSC	53.0	2827	58.9	3083
H1000	55.9	2878	62.1	3076
Magnum	60.6	2894	67.3	3158

Recommended Twist 1:8.5" or faster

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

* Recommended Powder

° Compressed Load

264 Winchester Magnum



140-grain Match Burner

Sectional Density .287

Ballistic Coefficient .586

C.O.A.L 3.235"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4831	51.7	2748	57.4	2994
PowerPro 4000MR	52.9	2805	58.8	3019
*RL 22	55.4	2802	61.5	3053
IMR 7828 SSC	54.4	2801	60.4	3027
H1000	57.4	2817	63.8	3048
Magnum	61.1	2835	67.8	3083

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load