


# 7mm Remington Magnum

Case: Remington	Primer: Federal 215
Case Trim: 2.490"	Barrel Length: 24"
Twist Rate: 1:9.5"	Barrel: Wiseman

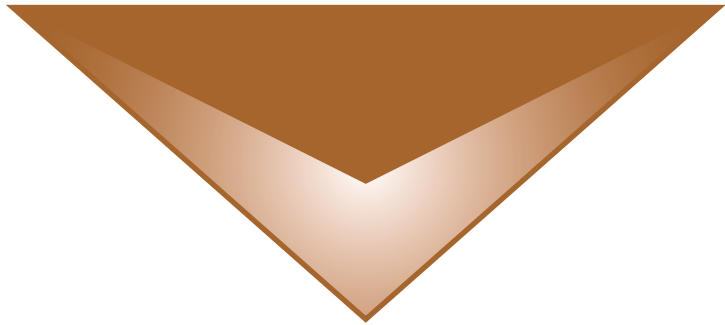

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*\*Recommended Powder*

<sup>°</sup> Compressed Load

## 7mm Remington Magnum



110-grain TTSX FB  
Sectional Density .195  
Ballistic Coefficient .319  
C.O.A.L 3.230"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hunter	64.2	3209	71.3	3515
RL 22	66.9	3219	74.3 <sup>c</sup>	3556
*H4831SC	67.5	3147	75.0 <sup>c</sup>	3470
IMR 4831	63.6	3211	70.7	3504
Power Pro 4000-MR	66.6	3243	74.0 <sup>c</sup>	3596
Supreme 780	67.6	3199	75.1 <sup>c</sup>	3525



120-grain TSX BT  
Sectional Density .213  
Ballistic Coefficient .349  
C.O.A.L 3.240"

Suggested Bullet Use



120-grain TTSX BT  
Sectional Density .213  
Ballistic Coefficient .373  
C.O.A.L 3.230"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hunter	62.5	3131	69.5	3387
Hybrid 100V	60.8	3130	67.6	3407
RL 19	66.9	3094	74.3 <sup>c</sup>	3437
H4831SC	65.2	3047	72.4	3345
IMR 4831	63.4	3040	70.4	3409
PowerPro 4000MR	63.8	3097	70.9	3444
*RL 22	66.6	3088	74.0 <sup>c</sup>	3414
IMR 7828SSC	66.2	3022	73.5	3375

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Recommended Powder

<sup>c</sup> Compressed Load

## 7mm Remington Magnum



139-grain LRX BT  
Sectional Density .246  
Ballistic Coefficient .470  
C.O.A.L 3.275"

Suggested Bullet Use



140-grain TSX BT  
Sectional Density .248  
Ballistic Coefficient .394  
C.O.A.L 3.240"

Suggested Bullet Use



140-grain TTSX BT  
Sectional Density .248  
Ballistic Coefficient .412  
C.O.A.L 3.230"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hybrid 100V	57.5	2893	63.9	3133
H4831SC	62.2	2929	69.1	3107
IMR 4831	55.1	2818	61.2	3066
Power Pro 4000-MR	59.2	2909	65.8	3184
RL 22	61.2	2906	68.0	3169
IMR 7828SSC	60.5	2879	67.2	3128
H1000	62.8	2895	69.8	3113
*Magnum	69.3	2908	77.1 <sup>c</sup>	3199

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Recommended Powder

<sup>c</sup> Compressed Load

## 7mm Remington Magnum



145-grain LRX BT  
Sectional Density .257  
Ballistic Coefficient .486  
C.O.A.L 3.290"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
H4831SC	57.4	2742	63.8	2970
Power Pro 4000-MR	57.7	2782	64.2	3064
*RL 22	58.8	2851	65.3	3087
IMR 7828SSC	59.2	2731	65.7	3018
H1000	60.1	2814	66.7	3029
Magnum	67.5	2827	75.0 <sup>c</sup>	3106



150-grain TSX BT  
Sectional Density .266  
Ballistic Coefficient .408  
C.O.A.L 3.240"

Suggested Bullet Use



150-grain TTSX BT  
Sectional Density .266  
Ballistic Coefficient .450  
C.O.A.L 3.230"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
H4831SC	57.5	2678	63.9	2959
IMR 4831	54.5	2709	60.6	2958
PowerPro 4000MR	56.9	2760	63.2	3031
RL 22	58.9	2789	65.4	3011
IMR 7828SSC	59.1	2740	65.7	3021
*H1000	61.0	2758	67.7	2998
Magnum	68.4	2817	76.0 <sup>c</sup>	3099

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Recommended Powder

<sup>c</sup> Compressed Load

## 7mm Remington Magnum



160-grain TSX FB  
Sectional Density .283  
Ballistic Coefficient .392  
C.O.A.L 3.185"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4831	54.4	2598	60.4	2827
*PowerPro 4000MR	54.5	2664	60.5	2896
RL 22	53.5	2581	59.5	2800
IMR 782SSC	56.6	2632	62.9	2883
H1000	58.6	2642	65.1	2871
Retumbo	59.4	2699	66.0	2865
Magnum	66.3	2714	73.6 <sup>c</sup>	2952



168-grain LRX BT  
Sectional Density .298  
Ballistic Coefficient .550  
C.O.A.L 3.290"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4831	51.0	2497	56.7	2726
Power Pro 4000-MR	53.9	2571	59.9	2801
*RL 22	53.2	2553	59.1	2759
IMR 782SSC	54.0	2562	60.0	2782
H1000	57.4	2577	63.8	2808
Retumbo	59.4	2614	66.0	2824
Magnum	64.0	2656	71.1 <sup>c</sup>	2882

RECOMMENDED TWIST: 1:8" OR FASTER

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Recommended Powder

<sup>c</sup> Compressed Load

## 7mm Remington Magnum



### 171-grain Match Burner

Sectional Density .303  
Ballistic Coefficient .645  
C.O.A.L 3.290"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*IMR 4831	55.5	2613	61.6	2853
PowerPro 4000MR	55.9	2615	62.1	2875
RL 22	55.5	2687	61.6	2847
IMR 7828SSC	57.0	2629	63.4	2874
H1000	62.0	2627	68.9	2890
Retumbo	63.1	2693	70.1	2913
Magnum	64.2	2643	71.3	2904



### 175-grain TSX FB

Sectional Density .310  
Ballistic Coefficient .417  
C.O.A.L 3.185"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hybrid 100V	50.7	2467	56.3	2720
Superformance	51.5	2469	57.2	2696
H4831SC	52.2	2410	58.1	2651
IMR 4831	51.3	2433	57.0	2667
PowerPro 4000MR	53.2	2481	59.1	2732
RL 22	52.7	2453	58.6	2684
*H1000	57.2	2492	63.6	2717
Retumbo	56.8	2463	63.1	2639
Magnum	60.9	2553	67.7	2780

RECOMMENDED TWIST: 1:9" OR FASTER

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Recommended Powder

<sup>c</sup> Compressed Load