


6.5x284 Norma

| | |
|-------------------|---------------------|
| Case: Norma | Primer: Federal 210 |
| Case Trim: 2.160" | Barrel Length: 26" |
| Twist Rate: 1:8" | Barrel: Shilen |

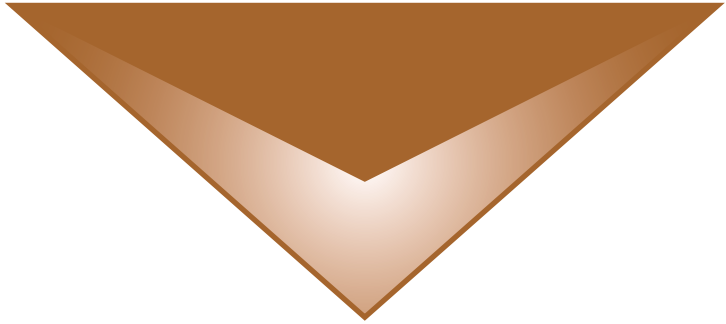

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Most Accurate Load*

[°] Compressed Load

6.5x284 Norma



127-grain LRX BT
Sectional Density .260
Ballistic Coefficient .468
C.O.A.L 2.980"

Suggested Bullet Use



130-grain TSX FB
Sectional Density .266
Ballistic Coefficient .365
C.O.A.L 2.880"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|---------------|-----------------|----------------|-----------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| Superformance | 43.3 | 2713 | 48.2 | 2909 |
| RL 22 | 45.8 | 2796 | 50.9 | 3016 |
| H4831sc | 45.6 | 2667 | 50.6 | 2903 |
| *H1000 | 46.5 | 2665 | 51.7 | 2932 |
| RL 26 | 46.1 | 2801 | 51.2 | 2998 |
| IMR 7977 | 48.7 | 2698 | 54.2 | 2918 |

Recommended Twist 1:8" or faster



140-grain Match Burner
Sectional Density .287
Ballistic Coefficient .586
C.O.A.L 2.980"

Suggested Bullet Use



| Powder | Minimum | | Maximum | |
|---------------|-----------------|----------------|-----------------|----------------|
| | Charge (grains) | Velocity (fps) | Charge (grains) | Velocity (fps) |
| Superformance | 45.5 | 2659 | 49.5 | 2817 |
| Win 780 | 47.6 | 2604 | 52.9 | 2868 |
| IMR 4955 | 45.1 | 2614 | 47.5 | 2729 |
| *H4831sc | 46.6 | 2589 | 51.8 | 2812 |
| Norma MRP | 46.8 | 2605 | 52.0 | 2884 |
| RL 22 | 46.7 | 2653 | 51.8 | 2903 |
| Magnum | 52.6 | 2645 | 58.5 | 2961 |
| H1000 | 51.1 | 2641 | 56.7 | 2909 |
| RL 26 | 48.7 | 2635 | 54.1 | 2938 |
| IMR 7977 | 49.2 | 2512 | 54.6 | 2813 |

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Most Accurate Load

° Compressed Load