

# 375 Remington Ultra Magnum

Case: R-P


Primer: Fed GM215M

Case Trim: 2.840"

Barrel Length: 24"

Twist Rate: 1:12"

Barrel: Wiseman

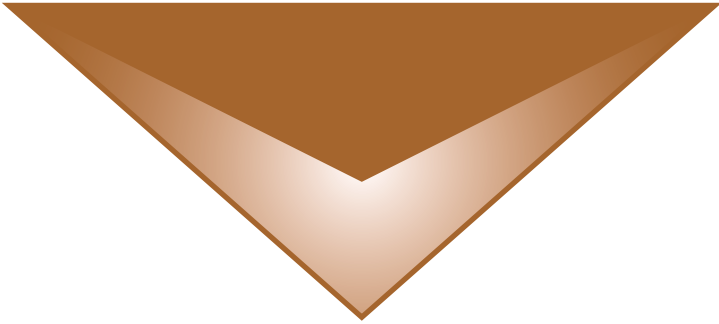

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*\*Most Accurate Load*

<sup>°</sup> Compressed Load

## 375 Remington Ultra Magnum



235-grain TSX FB  
Sectional Density .239  
Ballistic Coefficient .270  
C.O.A.L 3.575"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hunter	97.0	3040	105.0	3237
*RL 19	100.0	2996	107.0 <sup>c</sup>	3191
A 2700	91.0	2946	99.0	3190
Win 760	91.5	2949	99.5	3188
IMR 4350	93.5	2987	101.5 <sup>c</sup>	3209
H4350	92.0	2965	100.0	3198



270-grain TSX FB  
Sectional Density .274  
Ballistic Coefficient .326  
C.O.A.L 3.575"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*H4350	88.0	2767	96.0	2959
Hunter	90.5	2765	98.5	2983
A 2700	83.0	2700	91.0	2917
IMR 4350	89.5	2771	97.5 <sup>c</sup>	2986
RL 19	95.0	2812	102.5 <sup>c</sup>	3019
IMR 4831	92.0	2752	100.5 <sup>c</sup>	2999



270-grain LRX BT  
Sectional Density .274  
Ballistic Coefficient .449  
C.O.A.L 3.590"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Most Accurate Load

<sup>c</sup> Compressed Load

## 375 Remington Ultra Magnum



300-grain TSX FB  
Sectional Density .305  
Ballistic Coefficient .357  
C.O.A.L 3.575"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Hunter	87.0	2605	94.0	2790
*IMR 4831	89.0	2597	97.0 <sup>c</sup>	2823
IMR 4350	86.0	2587	94.0 <sup>c</sup>	2811
H4350	84.0	2583	92.0	2794
RL 19	92.0	2631	100.0 <sup>c</sup>	2840
H4831sc	91.0	2593	99.0 <sup>c</sup>	2788



350-grain TSX FB  
Sectional Density .356  
Ballistic Coefficient .408  
C.O.A.L 3.550"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*A 2700	78.5	2379	85.5	2534
RL 17	73.0	2313	80.0	2521
IMR 4350	78.0	2359	85.0	2553
H4350	73.0	2297	80.0	2489
Hunter	76.0	2324	83.0	2510
Hybrid 100v	80.0	2420	87.0 <sup>c</sup>	2580

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Most Accurate Load

<sup>c</sup> Compressed Load