

# 338-378 Weatherby Magnum

Case: Norma


Primer: Federal GM215M

Case Trim: 2.903"

Barrel Length: 25"

Twist Rate: 1:10"

Barrel: Wiseman

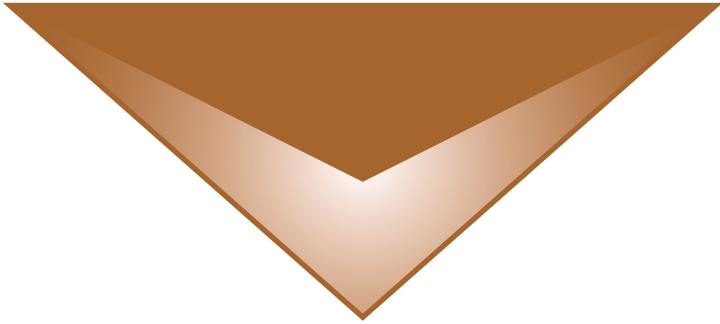

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*\*Most Accurate Load*

<sup>°</sup> Compressed Load

## 338-378 Weatherby Magnum



160-grain TTSX FB  
Sectional Density .200  
Ballistic Coefficient .342  
C.O.A.L 3.750"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*H1000	115.0	3417	122.0 <sup>c</sup>	3589
RL 25	116.0	3501	123.0 <sup>c</sup>	3713
RL 22	107.0	3451	114.0	3682
IMR 7828ssc	108.0	3376	115.0	3671
US869	130.0	3375	137.0 <sup>c</sup>	3522



185-grain TSX BT  
Sectional Density .231  
Ballistic Coefficient .352  
C.O.A.L 3.720"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
RL 25	105.0	3172	113.0	3373
*RL 22	98.5	3147	106.5	3346
H1000	104.0	3064	111.0	3252
US869	122.0	3112	130.0	3296



185-grain TTSX BT  
Sectional Density .231  
Ballistic Coefficient .432  
C.O.A.L 3.740"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Most Accurate Load

<sup>c</sup> Compressed Load

## 338-378 Weatherby Magnum



210-grain TSX FB  
Sectional Density .263  
Ballistic Coefficient .404  
C.O.A.L 3.720"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*H1000	99.0	2878	107.0	3076
RL 25	101.0	3013	108.5	3183
RL 22	94.5	2982	102.5	3158
US869	118.0	2957	124.0	3157



210-grain TTSX BT  
Sectional Density .263  
Ballistic Coefficient .482  
C.O.A.L 3.740"

Suggested Bullet Use



225-grain TSX FB  
Sectional Density .281  
Ballistic Coefficient .386  
C.O.A.L 3.720"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*RL 25	100.0	2966	105.0	3066
US869	114.0	2886	122.0	3056
H1000	96.5	2815	104.5	2976



225-grain TTSX BT  
Sectional Density .281  
Ballistic Coefficient .514  
C.O.A.L 3.740"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Most Accurate Load

° Compressed Load

## 338-378 Weatherby Magnum



250-grain TSX FB  
Sectional Density .313  
Ballistic Coefficient .425  
C.O.A.L 3.720"

Suggested Bullet Use



250-grain LRX BT  
Sectional Density .313  
Ballistic Coefficient .602  
C.O.A.L 3.750"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*RL 22	90.0	2696	98.0	2890
US869	110.5	2736	118.5	2948
H1000	92.0	2664	100.0	2826
RL 25	94.5	2747	102.5	2906

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

\*Most Accurate Load

<sup>c</sup> Compressed Load