


7mm-08 Remington

Case: Remington	Primer: Federal 210
Case Trim: 2.025"	Barrel Length: 24"
Twist Rate: 1:9.5"	Barrel: Bartlein

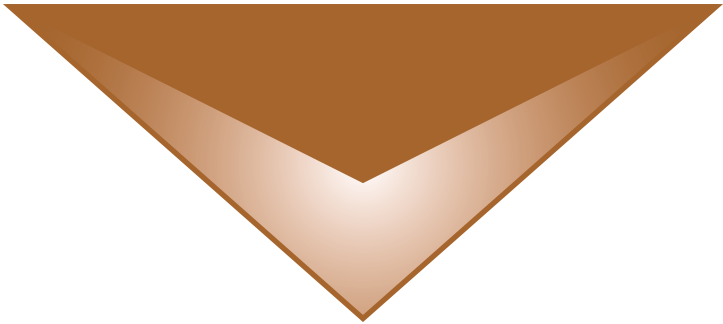

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Recommended Powder*

[°] Compressed Load

7mm-08 Remington



110-grain TTSX FB
Sectional Density .195
Ballistic Coefficient .319
C.O.A.L 2.800"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Win 748	44.6	3008	49.6 ^c	3291
BL-C(2)	45.2	3008	50.2 ^c	3297
*Varget	41.0	2906	45.6 ^c	3196
IMR 4064	41.2	2831	45.8 ^c	3136
IMR 4320	41.7	2836	46.3 ^c	3190
RL 15	42.8	2969	47.5 ^c	3248



120-grain TSX BT
Sectional Density .213
Ballistic Coefficient .349
C.O.A.L 2.735"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Win748	41.9	2820	46.5	3129
BL-C(2)	43.1	2839	47.8 ^c	3158
CFE 223	43.5	2894	48.4 ^c	3196
H4895	38.5	2778	42.8 ^c	3060
IMR 4895	40.6	2805	45.2	3109
*Varget	39.5	2769	43.9	3052
IMR 4064	39.6	2692	43.9	2995
RL 15	41.1	2826	45.7	3116
Power Pro 2000MR	43.6	2820	48.5 ^c	3143



120-grain TTSX BT
Sectional Density .213
Ballistic Coefficient .373
C.O.A.L 2.800"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

^{*}Recommended Powder

^c Compressed Load

7mm-08 Remington



139-grain LRX BT
Sectional Density .246
Ballistic Coefficient .470
C.O.A.L 2.800"

Suggested Bullet Use



140-grain TSX BT
Sectional Density .248
Ballistic Coefficient .394
C.O.A.L 2.735"

Suggested Bullet Use



140-grain TTSX BT
Sectional Density .248
Ballistic Coefficient .412
C.O.A.L 2.800"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
BL-C(2)	39.7	2559	44.1	2854
CFE 223	39.9	2590	44.3	2886
Varget	37.1	2532	41.2	2779
IMR 4064	37.3	2493	41.4	2738
*Big Game	44.2	2664	49.1 ^c	2910
RL 15	38.3	2576	42.5	2817
A-2700	43.7	2661	48.5 ^c	2939
Power Pro 2000MR	41.7	2660	46.4 ^c	2933
RL 17	43.0	2618	47.8 ^c	2911

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

7mm-08 Remington



145-grain LRX BT

Sectional Density .257
Ballistic Coefficient .486
C.O.A.L 2.800"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
BL-C(2)	40.0	2516	44.4 ^C	2816
CFE 223	39.9	2544	44.4	2823
VARGET	36.3	2550	40.4	2771
IMR 4064	36.8	2461	40.9	2741
Big Game	43.4	2600	48.2 ^C	2846
RL 15	37.7	2494	41.9	2736
Power Pro 2000MR	41.4	2585	46.0 ^C	2870
H414	41.8	2519	46.5 ^C	2802
*RL 17	41.8	2576	46.5 ^C	2871



150-grain TSX BT

Sectional Density .266
Ballistic Coefficient .408
C.O.A.L 2.735"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
BL-C(2)	38.9	2454	43.3	2746
CFE 223	39.2	2496	43.6	2760
IMR 4064	36.6	2449	40.6	2691
Big Game	43.0	2580	47.7 ^C	2839
RL 15	36.9	2465	41.0	2681
H414	41.2	2505	45.8 ^C	2769
*Power Pro 2000MR	40.7	2533	45.2	2815



150-grain TTSX BT

Sectional Density .266
Ballistic Coefficient .450
C.O.A.L 2.800"

Suggested Bullet Use



Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^C Compressed Load

7mm-08 Remington



160-grain TSX FB
Sectional Density .283
Ballistic Coefficient .392
C.O.A.L 2.735"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
BL-C(2)	37.8	2293	42.0	2575
CFE 223	37.5	2330	41.6	2589
IMR 4064	35.2	2303	39.1	2530
*Big Game	41.8	2418	46.5 ^c	2678
RL 15	34.9	2286	38.8	2501
Power Pro 2000MR	39.3	2392	43.7	2664
H414	40.5	2399	45.0 ^c	2639
RL 17	40.7	2415	45.2 ^c	2680



171-grain Match Burner
Sectional Density .303
Ballistic Coefficient .645
C.O.A.L 2.800"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
BL-C(2)	38.4	2318	42.6	2595
CFE 223	38.1	2341	42.3	2605
IMR 4064	36.1	2378	40.1	2581
Big Game	41.0	2429	45.5 ^c	2647
A-2700	40.6	2377	45.1 ^c	2657
IMR 4007SSC	40.1	2366	44.5 ^c	2625
Power Pro 2000MR	39.2	2385	43.6	2647
*H414	40.8	2354	45.3 ^c	2639
RL 17	39.3	2349	43.6 ^c	2635

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load