


223 Remington

Case: Remington	Primer: Remington 7 1/2
Case Trim: 1.750"	Barrel Length: 24"
Twist Rate: 1:12"	Barrel: Wiseman

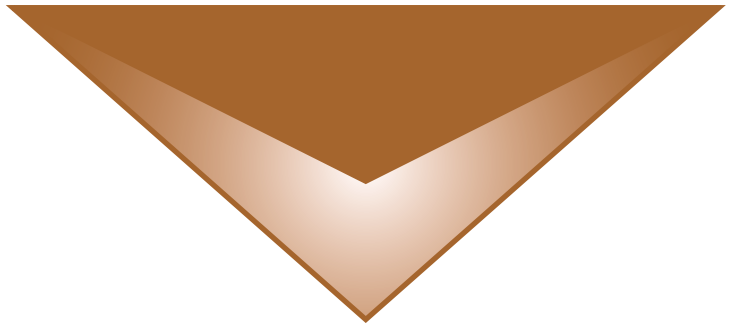

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

**Recommended Powder*

[°] Compressed Load

223 Remington



30-grain Varmint Grenade

Sectional Density .085
Ballistic Coefficient .101
C.O.A.L 2.115"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
IMR 4198	21.2	3713	23.2	4133
Benchmark	26.2	3789	28.2	4091
RL 10X	24.0	3831	26.0	4129
*A-2460	27.4	3947	29.4	4180
H335	26.2	3770	28.2	4014
TAC	29.0	3921	31.0	4075



36-grain Varmint Grenade

Sectional Density .102
Ballistic Coefficient .149
C.O.A.L 2.190"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro 1200-R	23.6	3456	26.2	3811
*RL 10X	22.8	3361	25.4	3731
IMR 8208 XBR	25.5	3507	28.3 ^c	3864
H335	25.9	3552	28.7	3845
IMR 4198	20.5	3473	22.5	3796
A-2015	23.0	3454	25.0	3755
RL 7	22.0	3488	24.0	3774
Benchmark	25.0	3514	27.0	3800
X-Terminator	25.0	3504	27.0	3777
TAC	27.5	3681	29.5	3876

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

* Recommended Powder

^c Compressed Load

223 Remington



40-grain VARMIN-A-TOR
Sectional Density .114
Ballistic Coefficient .153
C.O.A.L 2.175"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
A-2015	23.3	3227	25.9 ^c	3591
RL 7	22.0	3380	24.4	3676
Benchmark	25.0	3345	27.7 ^c	3748
H322	24.1	3335	26.8 ^c	3717
X-Terminator	24.2	3361	26.8	3702
*RL 10X	22.5	3330	25.0	3648
Power Pro 1200-R	23.2	3411	25.8	3714
Win 748	26.4	3275	29.4	3684
IMR 8208 XBR	25.3	3392	28.1 ^c	3774
H335	24.8	3376	27.5	3702



45-grain TSX FB
Sectional Density .128
Ballistic Coefficient .188
C.O.A.L 2.200"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
RL 10X	22.2	3229	24.7	3516
PowerPro 1200-R	22.9	3266	25.5	3579
IMR 8208 XBR	24.8	3286	27.6 ^c	3615
*A-2460	25.3	3363	28.1 ^c	3651
IMR 4198	20.0	3126	22.0	3479
A-2015	22.5	3225	24.5	3496
Benchmark	24.0	3185	26.0	3521
X-Terminator	24.0	3212	26.0	3489
BL-C(2)	27.0	3289	29.0	3520
TAC	26.0	3333	28.0	3549

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

223 Remington



50-grain TSX FB
 Sectional Density .142
 Ballistic Coefficient .197
 C.O.A.L 2.180"

Suggested Bullet Use



50-grain TTSX FB
 Sectional Density .142
 Ballistic Coefficient .229
 C.O.A.L 2.180"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
*Power Pro Varmint	25.3	3142	28.1 ^C	3466
Benchmark	23.5	3057	26.1 ^C	3370
PowerPro 1200-R	21.9	3045	24.3	3346
AR-Comp	22.9	3109	25.4 ^C	3408
RL 10X	20.4	2958	22.4	3246
Win 748	24.6	3045	26.6 ^C	3283
A-2460	23.0	3142	25.0	3381
H335	22.8	3045	24.8	3310
TAC	24.4	3065	26.4	3372
IMR 4895	24.0	3041	26.0 ^C	3314



50-grain Varmint Grenade
 Sectional Density .142
 Ballistic Coefficient .183
 C.O.A.L 2.200"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Power Pro Varmint	23.7	3010	26.4 ^C	3294
CFE 223	25.3	3081	28.1 ^C	3390
AR-Comp	21.1	2967	23.4	3231
*RL 10X	19.2	2810	22.2	3202
H335	21.4	2800	24.4	3210
TAC	23.4	2965	26.4 ^C	3332
H4895	21.8	2973	24.8 ^C	3293
IMR4895	22.2	2857	25.2	3229
Varget	22.8	2997	25.8 ^C	3288
A-2520	26.0	3069	29.0 ^C	3383

Recommended Twist: 1:10" or faster

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

* Recommended Powder

^C Compressed Load

223 Remington



52-grain Match Burner

Sectional Density .148
Ballistic Coefficient .224
C.O.A.L 2.200"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Power Pro Varmint	25.1	3043	27.8 ^c	3447
RL 10X	21.1	2964	23.5	3263
Win 748	24.5	2905	27.2 ^c	3307
BL-C(2)	25.1	2868	27.9 ^c	3316
IMR 8208 XBR	23.6	3042	26.2	3385
A-2460	22.9	3040	25.5	3361
H335	23.3	3017	25.8	3309
TAC	23.6	2974	26.2	3320
IMR 4895	24.1	2914	26.7 ^c	3308
*AR-Comp	22.9	3060	25.4	3363



53-grain TSX FB

Sectional Density .151
Ballistic Coefficient .204
C.O.A.L 2.180"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Power Pro Varmint	24.3	3037	27.0 ^c	3334
A-2460	22.9	3013	25.5	3319
CFE 223	25.5	3054	28.3 ^c	3404
AR-Comp	22.3	3052	24.8 ^c	3315
A-2015	21.5	3043	23.5	3296
X-Terminator	22.5	2960	24.5	3239
BL-C(2)	25.5	3102	27.5	3335
TAC	24.0	3051	26.0	3307
*H4895	23.5	2970	25.5	3292
Varget	24.5	3026	26.5 ^c	3247

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^c Compressed Load

223 Remington



55-grain MPG / TAC-RRLP
 Sectional Density .157
 Ballistic Coefficient .225
 C.O.A.L 2.220"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Power Pro Varmint	23.4	2838	26.0 ^c	3176
Win 748	22.8	2742	25.4 ^c	3061
BL-C(2)	23.5	2752	26.2 ^c	3102
A-2460	23.0	2893	25.6 ^c	3208
H335	20.9	2720	23.2	3028
CFE 223	24.5	2906	27.3 ^c	3227
TAC	22.6	2725	25.1 ^c	3112
*AR-Comp	20.2	2787	22.5	3039
RL 15	22.9	2812	25.5 ^c	3087
PowerPro 2000MR	25.3	2809	28.1 ^c	3140

Recommended Twist: 1:9" or faster



55-grain TSX FB / TAC-X FB
 Sectional Density .157
 Ballistic Coefficient .209
 C.O.A.L 2.180"

Suggested Bullet Use



55-grain TTSX BT
 Sectional Density .157
 Ballistic Coefficient .272
 C.O.A.L 2.180"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro Varmint	24.1	2969	26.8 ^c	3272
BL-C(2)	24.5	2874	27.3 ^c	3211
CFE 223	25.2	2998	28.0 ^c	3325
AR-Comp	21.3	2913	23.7	3181
RL 10X	19.6	2798	21.6	3068
Win 748	23.8	2923	25.8	3174
A-2460	21.6	2941	23.6	3188
*H335	22.2	2869	24.2	3145
TAC	23.4	2877	25.4	3178
IMR 4895	23.8	2915	25.8 ^c	3171

Recommended Twist For TTSX: 1:9" or faster

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

* Recommended Powder

^c Compressed Load

223 Remington



62-grain TSX BT / TAC-X BT
Sectional Density .177
Ballistic Coefficient .287
C.O.A.L 2.250"

Suggested Bullet Use



62-grain TTSX BT
Sectional Density .177
Ballistic Coefficient .294
C.O.A.L 2.250"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro Varmint	23.5	2860	26.2 ^C	3154
A-2460	22.4	2818	24.9	3119
CFE 223	24.2	2838	26.9 ^C	3163
AR-Comp	21.2	2802	23.5	3082
A-2015	20.0	2795	22.0	3018
BL-C(2)	23.5	2825	25.5	3046
TAC	22.5	2787	24.5	3055
H4895	22.5	2876	24.5	3034
*Varget	23.5	2807	25.5 ^C	3021
RL 15	23.5	2876	25.5 ^C	3066

Recommended Twist: 1:9" or faster



69-grain Match Burner
Sectional Density .196
Ballistic Coefficient .339
C.O.A.L 2.250"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro Varmint	22.4	2654	24.8	2942
BL-C(2)	23.1	2625	25.7	2914
CFE 223	23.1	2683	25.7	2966
*TAC	21.8	2615	24.2	2900
H4895	21.3	2641	23.7	2907
Varget	22.3	2635	24.7 ^C	2897
A-2520	23.4	2698	26.0 ^C	2973
AR-Comp	20.0	2628	22.2	2851
RL 15	22.3	2636	24.8	2908
PowerPro 2000MR	23.9	2659	26.6 ^C	2938

Recommended Twist: 1:10" or faster

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

*Recommended Powder

^C Compressed Load

223 Remington



70-grain TSX BT / TAC-X BT
Sectional Density .199
Ballistic Coefficient .314
C.O.A.L 2.250"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
PowerPro Varmint	21.5	2585	23.8	2871
CFE 223	22.4	2630	24.9 ^c	2932
AR-Comp	18.8	2544	20.9	2753
*PowerPro 2000MR	23.5	2651	26.1 ^c	2891
A-2015	19.0	2560	21.0	2833
BL-C(2)	22.5	2639	24.5	2867
TAC	21.5	2684	23.5	2853
H4895	21.5	2623	23.5	2879
Varget	22.5	2627	24.5 ^c	2840
RL 15	22.5	2706	24.5 ^c	2915

Recommended Twist: 1:8" or faster



85-grain Match Burner
Sectional Density .242
Ballistic Coefficient .410
C.O.A.L 2.260"

Suggested Bullet Use



Powder	Minimum		Maximum	
	Charge (grains)	Velocity (fps)	Charge (grains)	Velocity (fps)
Win 748	20.9	2325	23.3	2599
BL-C(2)	21.2	2328	23.6	2588
*CFE 223	21.5	2408	23.9	2634
TAC	20.7	2330	22.9	2599
H4895	18.9	2325	21.0	2528
IMR 4895	20.1	2310	22.3	2564
Varget	20.4	2355	22.7	2574
A-2520	21.8	2414	24.3	2651
RL 15	20.0	2341	22.3	2540
PowerPro 2000MR	22.8	2423	25.3 ^c	2669

Recommended Twist: 1:8" or faster

Maximum Loads Should Be Used With Caution - Always Start With Minimum Loads.

* Recommended Powder

^c Compressed Load